

A61C A62C Curved Truss Arm

Aluminum Mounting and Poles

Project: _____ Location: _____

Customer: _____

Order Number: _____ Qty: _____ Type: _____

Product Number: _____

The **A61C** and **A62C** Curved Truss mountings are mechanically assembled on the tapered poles. The mountings and poles are conceived and produced to fit together as a unit for individual projects. This ensures that the assembly performs perfectly.


ALU MC3 provides complete solutions based on your project details, drawings, reach, height and needs. Mounting heights up to 30' (9,14m).

Mounting: The **A61C** and **A62C** curved truss mountings are made from 6063 aluminum alloy elements formed and welded together. The assembly is heat treated to produce a T6 temper.


Pole Details: The technical details of the pole and the mounting vary depending on the height and reach required. These details influence the pole's characteristics: base diameter, wall thickness, types of anchor bolts and bolt circle.

Certification: All poles are designed to American Association of State Highway & Transportation Officials (AASHTO) standards. The poles meet applicable ASTM standards. All welders are American Welding Society (AWS) certified.


Finish: The standard finish for the pole and mounting assembly and components is natural brushed, or a polyester powder coating applied in accordance with ALU MC3's specifications. Additional colors are available on special order (RAL number required).

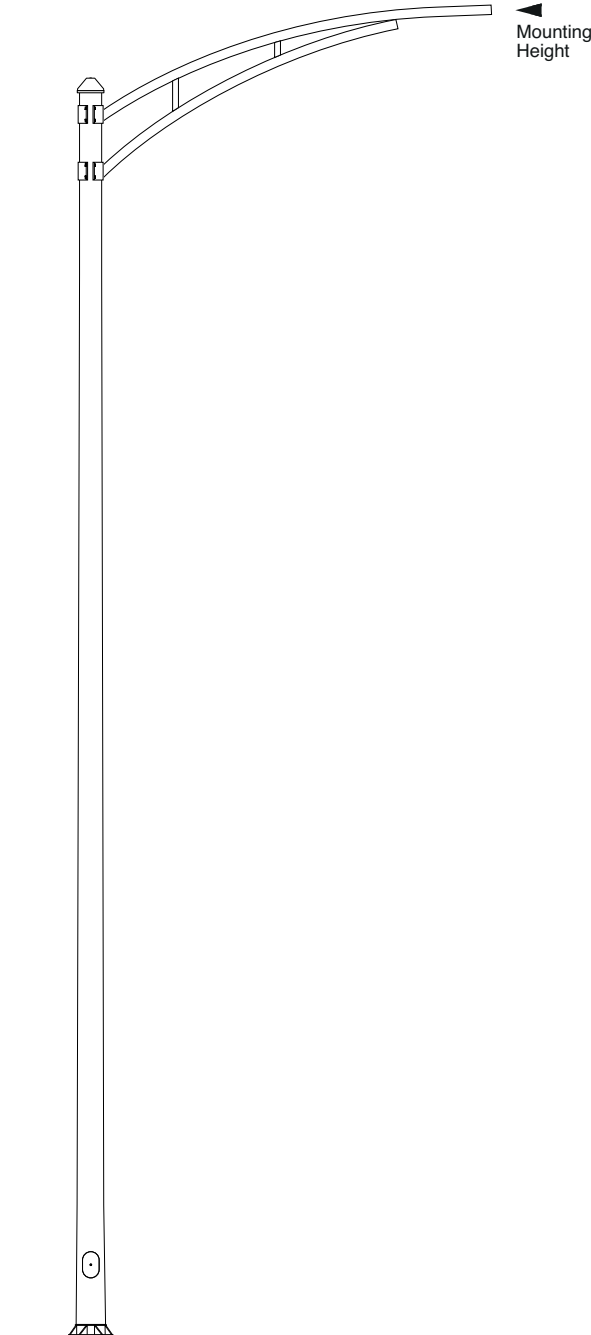


A61C Single



A62C Double

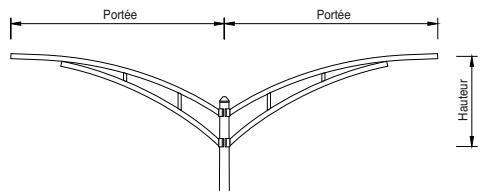

Tenon Detail



In its ongoing product improvement program ALU MC3 reserves the right to change these specifications without notice.

Name: _____ Notes: _____

Signature: _____ Date: _____

A61C A62C Curved Truss Arm

Aluminum Mounting and Poles

Project: _____ Location: _____

Customer: _____

Order Number: _____ Qty: _____ Type: _____

Product Number: _____


Ordering Information:

Model	Mounting Height	Reach	Fastener	Color	Accessories
A61C	2000 20.0' (6.10m)	0400 4.0' (1.22m)	PP1 Short Butterfly	BRA Brushed Aluminum	DR Duplex Support
A62C	2500 25.0' (7.62m)	0600 6.0' (1.82m)	PP2 Medium Butterfly	WHS White Smooth	CB1 Round Base Cover
	3000 30.0' (9.14m)	0800 8.0' (2.43m)	PP3 Long Butterfly	WHT White Textured	CB2 Square Base Cover
		1000 10.0' (3.05m)	PP8 Large Butterfly 8"	BKS Black Smooth	
			PP9 Large Butterfly 9"	BKT Black Textured	
				DBS Dark Bronze Smooth	
				DBT Dark Bronze Textured	
				GRS Grey Smooth	
				GRT Grey Textured	
				SPS Special Smooth*	
				SPT Special Textured*	


For other configurations possible.
Consult manufacturer for details.

* RAL number required


A61C Single



A62C Double

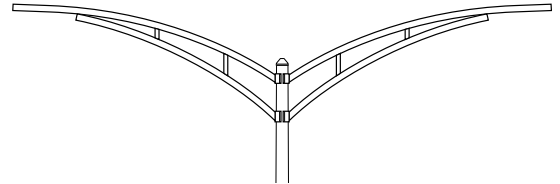

For higher mounting
heights consult
A41C, A42C Truss Arm
specification sheet.

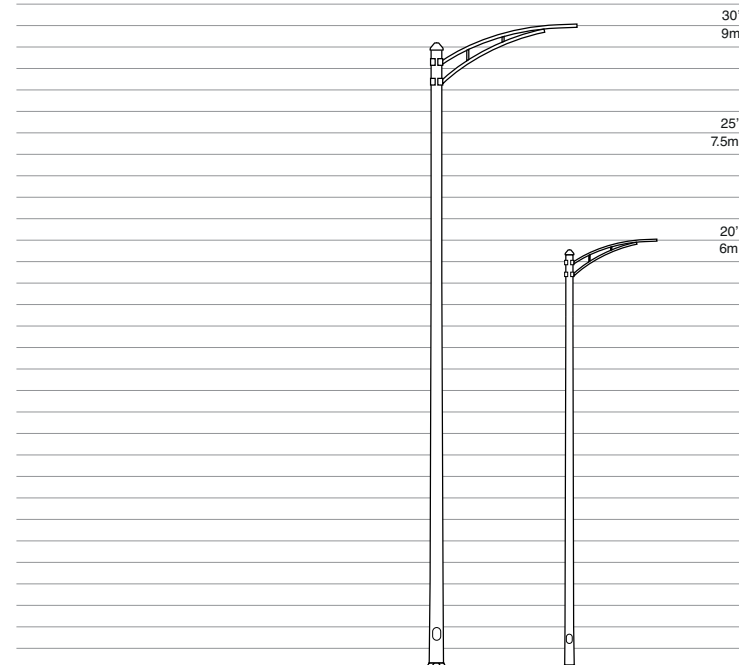

In its ongoing product improvement program
ALU MC3 reserves the right to change these
specifications without notice.

Name: _____ Notes: _____

Signature: _____ Date: _____